WALL TYPE LEGEND

NOT TO SCALE

- NEW PARTITION, IF UNNOTED TO BE STANDARD WALL TYPE LISTED IN STANDARD FINISH AND EQUIPMENT SCHEDULE
- EXISTING PARTITION
- NEW PARTITION WITH SOUND ATTENUATING INSULATION
- NEW PARTITION EXTENDING FROM DECK TO DECK ABOVE
- NEW FIRE RATED PARTITION EXTENDING FROM DECK TO DECK ABOVE
- NEW SMOKE BARRIER PARTITION EXTENDING FROM DECK TO DECK ABOVE
- NEW SCIF PARTITION EXTENDING FROM DECK TO DECK ABOVE , SEE SCIF PARTITION TYPES (VARIES)
- NEW HALF HEIGHT PARTITION SEE PARTITION TYPES FOR HEIGHT ABOVE FLOOR
- EXISTING HALF HEIGHT PARTITION HEIGHT AS NOTED
- EXISTING PARTITION TO BE REMOVED

PARTITION NOTES & DETAILS

REFER TO THE TYPICAL LIMITING HEIGHTS FOR INTERIOR PARTITIONS AND CHASE WALL PARTITIONS TABLES FOR STUD SIZE, GAUGE, SPACING AND MAXIMUM HEIGHT. THIS CHART WAS PROVIDED BY UNITED STATES GYPSUM COMPANY SA923. FOR INFORMATION ON OTHER MATERIALS, CONSULT AND CONFORM TO MANUFACTURER'S RECOMMENDED TYPE AND SPACING. THE MAXIMUM DEFLECTION ALLOWED SHALL BE L/120 UNLESS NOTED OR REQUIRED OTHERWISE. THE MAXIMUM DEFLECTION ALLOWED FOR WALLS WITH WALL TILE SHALL BE L/360.

IF THERE IS TO BE AN UNUSUAL LOAD APPLIED TO THE PARTITION, OR THERE IS UNCERTAINTY ON THE PART OF THE CONTRACTOR, THE ARCHITECT'S STRUCTURAL ENGINEER SHALL BE CONSULTED. IF THE ARCHITECT HAS NOT CONTRACTED WITH A STRUCTURAL ENGINEER, THE CONTRACTOR SHALL CONSULT WITH A STRUCTURAL ENGINEER LICENSED IN THE STATE WHERE THE PROJECT IS LOCATED.

IF A RATED WALL HAS A LISTED TEXT NUMBER - CONSTRUCTION WILL CONFORM TO ALL OF THE CRITERIA OF THE TEST. SUBSTITUTE OTHER GYPSUM BOARD MATERIALS AS REQUIRED BY ROOM FINISH SCHEDULE AND SECTION 09250 - GYPSUM BOARD TO MAINTAIN REQUIRED ASSEMBLY FIRE RATINGS. SUBSTITUTE CLASSIFIED CEMENTITIOUS TILE BACKER BOARD AS REQUIRED BY ROOM FINISH SCHEDULE AND SECTION 09300 - TILE WITH STUDS MAXIMUM OF 16" OC TO MAINTAIN REQUIRED ASSEMBLY FIRE RATINGS.

IF AN EXISTING WALL IS NOTED WITH A WALL TYPE THE CONTRACTOR SHALL DETERMINE THAT THE EXISTING WALL IS IN ACCORDANCE WITH THE CONSTRUCTION OF THE WALL TYPE NOTED AND NOTIFY THE ARCHITECT IF THE EXISTING WALL IS NOT IN ACCORDANCE WITH THE WALL TYPE SPECIFIED

NON-RATED ACOUSTIC PARTITION TYPES SHALL HAVE SOUND ATTENUATION FIBERGLASS BATTS, SIZED TO FIT THE STUD DEPTH, INSTALLED CONTINUOUSLY FROM FLOOR TO TOP OF PARTITION. IN PARTITION TYPES THAT TERMINATE AT A SUSPENDED CEILING, A 48" WIDE ENCAPSULATED FIBERGLASS BATT BLANKET SHALL BE INSTALLED ON TOP OF CEILING CENTERED OVER THE PARTITION. ACOUSTIC SEALANT SHALL BE INSTALLED BETWEEN RUNNER AND THE STRUCTURE BELOW, AND RUNNER AND CEILING ABOVE THE PARTITION. FIRE RATED ACOUSTIC PARTITION TYPES SHALL HAVE MINERAL WOOL BATTS, SIZED TO FIT THE STUD DEPTH, INSTALLED CONTINUOUSLY FROM FLOOR TO TOP OF PARTITION.

A DOOR ELEVATIONS

SCALE: 3/8" = 1'-0"

NOTES:

CONTRACTOR TO VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.

REFER TO THE STD. FINISHES & EQUIPMENT SCHEDULE FOR MANUFACTURERS, PRODUCTS, & FINISHES.

ALL GLAZING SHALL BE SAFETY GLAZING, TEMPERED OR LAMINATED. GLAZING ON GLASS PANELS SHALL BE MIN 1/4" THICK.

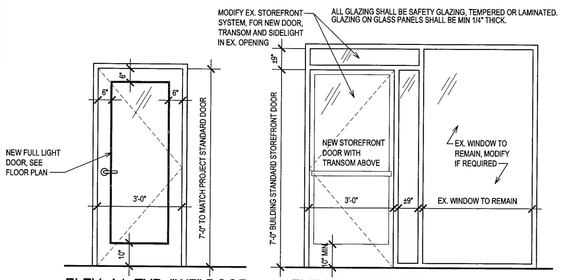

ELEV. A1: TYP. "WF" DOOR

ELEV. A2: NEW STOREFRONT DOOR

TYPE "CA" PARTITIONS (CHASE WALL ACOUSTIC)

NOT TO SCALE



TYPE "P" PARTITIONS

NOT TO SCALE



DRAWING NOTES

THE FOLLOWING NOTES APPLY TO ALL DRAWINGS

1. THE SCALE OF THE DRAWING IS APPROXIMATE. IF A DIMENSION REQUIRED FOR CONSTRUCTION IS NOT SHOWN ON THE DRAWING, THE CONTRACTOR SHOULD CONSULT THE ARCHITECT FOR CLARIFICATION.

2. ALL CONSTRUCTION INDICATED AS NEW BUT UNNOTED WILL BE OF THE STANDARD TYPE.

3. NEW ACOUSTICAL TILE CEILING GRIDS WILL BE LAID OUT TO BE OF A CONSISTENT SPACING, PATTERN AND HEIGHT THROUGHOUT THE FLOOR SO THAT THE CEILING GRID CAN BE MAINTAINED DURING TENANT CHANGE.

4. ALL DIMENSIONS ARE GIVEN TO THE NOMINAL FINISH FACE. EQUIPMENT REQUIRING EXACT CLEARANCES SHOULD BE COORDINATED BY THE CONTRACTOR.

5. UNLESS OTHERWISE NOTED, INSTALLATION OF DATA, TELEPHONE AND SECURITY SYSTEMS ARE NOT PART OF THE WORK OF THIS CONTRACT.

6. SEE MECHANICAL AND ELECTRICAL DRAWINGS FOR NUMEROUS ITEMS REQUIRING INTERFACE AND COORDINATION BY THE CONTRACTOR. THE REFLECTED CEILING SHOWS ONLY THE PATTERN OF THE CEILING GRID.

PARTITION CONSTRUCTION

TYP. INTERIOR PARTITION TYPE: P3, U.N.O.
GC SHALL VERIFY AND CONFIRM THE EXISTING STUD SIZE, GAUGE AND SPACING IN USE WITHIN THE TENANT SPACE AND/OR BUILDING. AND SHALL NOTIFY THE ARCHITECT OF ANY DISCREPANCIES BEFORE FRAMING COMMENCES.

STANDARD GYPSUM BOARD THICKNESS: 1/2"

PERIMETER WALLS/PARTITIONS: GYPSUM BOARD

COLUMN ENCLOSURES: GYPSUM BOARD ENCLOSURE

CEILING/WALL INTERFACE: FAST MASK.

TYPICAL DEVICE MOUNTING LOCATIONS

NOT TO SCALE
DO NOT LOCATE AA OR SS ON LOGO WALLS.

LEGEND:

AA	AUDIBLE ALARM
SS	SAFETY STROBE
W	WALL PHONE
S	LIGHT SWITCH
T	THERMOSTAT
V	VOICE/DATA
E	RECEPTACLE
F	WALL MTD FURNITURE IN-FEED

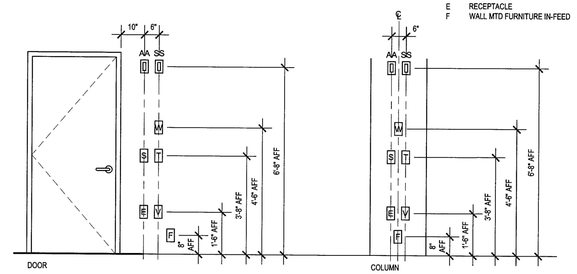

TYPE "K" PARTITIONS (KNEE HEIGHT)

NOT TO SCALE



TYPE "F" PARTITIONS (FURRING)

NOT TO SCALE



ABBREVIATIONS

AB	- ANCHOR BOLT
ABS	- ABOVE BUILDING STANDARD
A/C	- AIR CONDITIONING
ACOUS	- ACOUSTIC
ADJT	- ADJUSTABLE
AFF	- ABOVE FINISH FLOOR
ALUM	- ALUMINUM
AP	- ACCESS PANEL
APPD	- APPROVED
APX	- APPROXIMATE
ARCH	- ARCHITECT
BD	- BOARD
BDRM	- BEDROOM
BET	- BETWEEN
BLDG	- BUILDING
BLK	- BLOCK
BLKG	- BLOCKING
B.O.	- BOTTOM OF
BRG	- BEARING
BRK	- BRICK
BSMT	- BASEMENT
BT	- BOTTOM
CAB	- CABINET
CER	- CERAMIC
CJ	- CONTROL JOINT
CL	- CENTERLINE
CLG	- CEILING
CLR	- CLEAR
CMU	- CONCRETE MASONRY UNIT
CO	- CLEAN OUT
COL	- COLUMN
CONC	- CONCRETE
CONT	- CONTINUOUS
CORR	- CORRIDOR
CTR	- CENTER
DBL	- DOUBLE
DEG	- DEGREE
DIA	- DIAMETER
DIM	- DIMENSION
DISP	- DISPENSER
DN	- DOWN
DR	- DOOR
DS	- DOWN SPOUT
DWG	- DRAWING
E	- EAST
EIFS	- EXTERIOR INSULATION AND FINISH SYSTEM
EJ	- EXPANSION JOINT
ELEC	- ELECTRIC
ELEV	- ELEVATOR/ELEVATION
ENGR	- ENGINEER
EPS	- EXPANDED POLYSTYRENE
EQ	- EQUAL
EQP	- EQUIPMENT
ETC	- ETCETERA
EWC	- ELECTRIC WATER COOLER
EXH	- EXHAUST
EXP	- EXPANSION
EX	- EXISTING
EXT	- EXTERIOR
FD	- FLOOR DRAIN
FFE	- FINISH FLOOR ELEVATION
FIN	- FINISH
FIX	- FIXTURE
FL	- FLOOR
FLUR	- FLUORESCENT
FRT	- FIRE RETARDANT TREATED
FT	- FEET
FTG	- FOOTING
FUT	- FUTURE
GA	- GAUGE
GALV	- GALVANIZED
GC	- GENERAL CONTRACTOR
GL	- GLASS
GYP	- GYPSUM
HB	- HOSE BIB
HC	- HOLLOW CORE
HDCP	- HANDICAP
HDWR	- HARDWARE
HM	- HOLLOW METAL
HORIZ	- HORIZONTAL
H	- HEIGHT
ID	- INSIDE DIAMETER
IE	- THAT IS
IN	- INCH(S)
INCL	- INCLUDE (ING)
INSUL	- INSULATION
INT	- INTERIOR
JT	- JOINT
K	- THOUSAND
KIT	- KITCHEN
KO	- KNOCK-OUT
L	- LENGTH
LAM	- LAMINATED
LAV	- LAVATORY
LB	- POUND
LH	- LEFT HAND
LIN	- LINEAR
LT	- LIGHT
M	- MILLION
M.O.	- MASONRY OPENING
MAS	- MASONRY
MAX	- MAXIMUM
MECH	- MECHANICAL
MED	- MEDIUM
MEZZ	- MEZZANINE
MFR	- MANUFACTURER
MIN	- MINIMUM
MLD	- MOULDING
MOD	- MODEL
MTL	- METAL
MAT	- MATERIAL
MUL	- MULLION
N/A	- NOT APPLICABLE
N	- NORTH
NIC	- NOT IN CONTRACT
NO	- NUMBER
NOM	- NOMINAL
NTS	- NOT TO SCALE
OC	- ON CENTER
OD	- OUTSIDE DIAMETER
OFF	- OFFICE
OH	- OVERHEAD
OFCI	- OWNER FURNISHED CONTRACTOR INSTALLED
OPG	- OPENING
OPH	- OPPOSITE HAND
OZ	- OUNCE
PCF	- POUNDS PER CUBIC FOOT
PERP	- PERPENDICULAR
PL	- PLATE
PLMB	- PLUMBING
PLWD	- PLYWOOD
PM	- PROJECT MANAGER
POL	- POLISH
POLY	- POLYETHYLENE
PR	- PAIR
PFB	- PREFABRICATED
PFN	- PREFINISHED
PROJ	- PROJECT
PSI	- POUNDS PER SQUARE INCH
PSF	- POUNDS PER SQUARE FOOT
PT	- PRESSURE TREATED
PTD	- PAINTED
R	- RISER
RAD	- RADIUS
RD	- ROOF DRAIN
RECD	- RECEIVED
REF	- REFERENCE
REFL	- REFLECTED
REFG	- REFRIGERATOR
REINF	- REINFORCING
REQD	- REQUIRED
RH	- RIGHT HAND
RM	- ROOM
RO	- ROUGH OPENING
ROW	- RIGHT OF WAY
S	- SOUTH
SC	- SOLID CORE
SCHD	- SCHEDULE
SEC	- SECTION
SIM	- SIMILAR
SP	- STAND PIPE
SPEC	- SPECIFICATION
SQ	- SQUARE
SS	- STAINLESS STEEL
STD	- STANDARD
STL	- STEEL
STOR	- STORAGE
STR	- STRUCTURAL
SUB	- SUBSTITUTE
SUSP	- SUSPENDED
SYS	- SYSTEM
T	- TREAD
TELE	- TELEPHONE
TEMP	- TEMPERED
T.O.	- TOP OF
TYP	- TYPICAL
UC	- UNDER CUT
UL	- UNDERWRITERS LABORATORY
UNF	- UNFINISHED
UNO	- UNLESS NOTED OTHERWISE
VB	- VAPOR BARRIER
VCT	- VINYL COMPOSITION TILE
VERT	- VERTICAL
W	- WEST
W/	- WITH
W/O	- WITHOUT
WC	- WATER CLOSET
WD	- WOOD
WH	- WATER HEATER
WWM	- WELDED WIRE MESH

DRAWING LEGEND

NOT TO SCALE. SEE INDIVIDUAL DRAWINGS FOR LEGENDS AND KEYS THAT SUPERCEDE THOSE BELOW.

- 100 OFFICE — REFERENCE ROOM NUMBER: 100 ROOM NAME: OFFICE
- 5 — COLUMN CENTER LINE
- W5/PA — REFERENCE DOOR & HARDWARE TYPE
- 5 / T6 — REFERENCE SECTION 5 ON SHEET T6
- 1 A 3 / A6 4 — REFERENCE INTERIOR ELEVATIONS A1 THRU A4 ON SHEET T6
- 5 / T6 — REFERENCE DETAIL 5 ON SHEET T6
- A/T6 — REFERENCE ELEVATION A ON SHEET T6
- SPOT ELEVATION REFERENCE/ HORIZONTAL DATUM REFERENCE
- 2 — REVISION NUMBER
- BATT INSULATION
- P3 — REFERENCE WALL TYPE

DOOR LEGEND

NOT TO SCALE

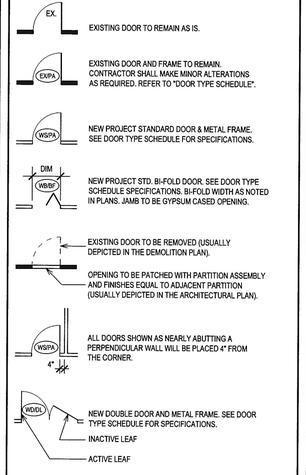

DIMENSION NOTES



MOUNTING LOCATIONS FOR TYPICAL ACCESSIBLE FIXTURES AND ACCESSORIES

SCALE: 1/4" = 1'-0"

NOTES:
- DETAILS ARE BASED ON 2010 ADA STANDARDS FOR ACCESSIBLE DESIGN.
- ALL EXPOSED LINES AND VALVES AT LAVATORIES SHALL BE INSULATED.
- FLUSH CONTROLS SHALL BE LOCATED ON THE OPEN SIDE OF THE WATER CLOSET.



ACCESSIBLE TOILET DIMENSIONS



ACCESSIBLE LAVATORY (WALL MOUNTED)



TYPICAL ACCESSORY MOUNTING HEIGHTS



ACCESSIBLE BI-LEVEL DRINKING FOUNTAINS

CLEAR FLOOR SPACE AT LAVATORY



CLEAR FLOOR SPACE AT TOILET

RECOMMENDED PLUMBING FIXTURES & ACCESSORIES, U.N.O.

NOTE: ALL OTHER FIXTURES AND ACCESSORIES TO BE MOUNTED AT INDUSTRY STANDARD MOUNTING HEIGHTS OR AS SPECIFIED IN THE MECHANICAL DRAWINGS. MODEL NUMBERS FOR EACH FIXTURE ARE FOR SERIES TYPE ONLY; MODIFY AS NEEDED FOR CONTROL LOCATION, ACCESSORIES, AND OTHER REQUIREMENTS.

PLUMBING FIXTURES	
ITEM	MODEL NO.
TOILETS IN 115 CHILD TOILET RM	GERBER, MAXWELL 1.28, WALL HUNG, ELONGATED BACK OUTLET TOILET
WALL HUNG LAVATORY	AMER. STD. 0355.012 LUCERNE WHITE OFFSET TRAP AND TRUEBRO INSULATION
INSULATION KIT	TRUEBRO LAV-GUARD 2 INSULATION KIT, WHITE, #102 E-Z WITH ACCESSORY #105 E-Z.
FAUCET	AMERICAN STANDARD 2275.509 COLONY SOFT 2 HANDLE CENTERSET
BI-LEVEL WATER COOLER UNDER-MOUNT SINK AT BREAK AND STAFF	ELKAY EWMP028K, ELKAY, ELUHAD211550, WITH TRUEBRO INSULATION.
FAUCET AT BREAK AND STAFF	DELTA, 9159-DST TRINSIC
DISPOSER AT BREAK AND STAFF	IN SINK ERATOR, BADGER 5XP

STANDARD ACCESSORIES	
ITEM	MODEL NO.
TOILET PARTITIONS	SEE STANDARD FINISH AND EQUIPMENT SCHEDULE
TOILET TISSUE DISPENSER	BOBRICK B-27460, DOUBLE- ROLL DISPENSER
36" GRAB BAR	BOBRICK B-6806 X 36"
42" GRAB BAR	BOBRICK B-6806 X 42"
MIRROR WITH FRAME	BOBRICK B-1658 2436
SURFACE MOUNTED SOAP	BOBRICK B-4112
PAPER TOWEL DISPENSER	BOBRICK B-4262
STANDALONE WASTE RECEPTACLE	BY TENANT

MULLION INTERFACE

SCALE: 3" = 1'-0"



STATE OF MARYLAND STEPHANIE B NUNN 14706 ARCHITECT

Stephanie B Nunn

Digitally signed by Stephanie B Nunn
Date: 2021.03.03 19:08:17 -05'00'

I CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED ARCHITECT UNDER THE LAWS OF THE STATE OF MARYLAND, LICENSE NUMBER: 14706 EXP. DATE: 10/31/2022

RECEIVED
APR 09 2021
LICENSES & PERMITS DIVISION

REVIEWED FOR CODE COMPLIANCE
Department of Inspections, Licenses and Permits
Howard County
Date: 03/16/21
By: Adolphe Hurlaux

REV. NO.	DATE	DESCRIPTION

CONTRACTOR:

PROJECT MANAGER:
SCOT PENN KNOLLS ROAD
COLUMBIA, MD 21045
410-992-6200 x 6200
WASHINGTON 301-627-4800
www.ArkumAE.com
PHONE: 443-285-5664

ARCHITECT / MEP ENGINEER: ARIUM AE

PROJECT: LITTLE LEAVES BEHAVIORAL SERVICES
GROUND LEVEL, SUITE A
7150 COLUMBIA GATEWAY DRIVE
COLUMBIA, MD 21046

TITLE: DRAWINGS STANDARDS AND DETAILS
PROJECT FILE NAME: C050-LLBS_Z213
ISSUE DATE: 03 MARCH 2021
LATEST REVISION:
PM: SLA | BY: LMD
SM: SBN
COPYRIGHT © 2021 Arium AE, LLC

DWG NO. T3