

Ledger Type	Connector Type	ICFVL Spacing To Replace Anchor Bolts (in.) ^{1,2,3}															
		1/2"-Diameter Anchors at				5/8"-Diameter Anchors at				(2) 5/8"-Diameter Anchors at				3/4"-Diameter Anchors at			
		12" O.C.	24" O.C.	36" O.C.	48" O.C.	12" O.C.	24" O.C.	36" O.C.	48" O.C.	12" O.C.	24" O.C.	36" O.C.	48" O.C.	12" O.C.	24" O.C.	36" O.C.	48" O.C.
DF/SP/SPF	ICFVL w/ ICFVL-W	48	48	48	48	48	48	48	48	24	48	48	48	42	48	48	48
LVL	ICFVL w/ ICFVL-CW	48	48	48	48	48	48	48	48	24	48	48	48	42	48	48	48
68 mil (0.068")	ICFVL	11	22	33	44	9	18	27	36	—	—	—	—	—	—	—	—
54 mil (0.054")	ICFVL	15	30	45	48	12	24	36	48	—	—	—	—	—	—	—	—


GNP Inc
AutoCAD
REVIT
Drawings

ICF CONSTRUCTION
1-800-713-7663
MID-ATLANTIC REGION



www.gnphouse.com

RESIDENCE FOR:
THORNE RESIDENCE
21629 Keeney Rd
Parkton, Maryland 21120

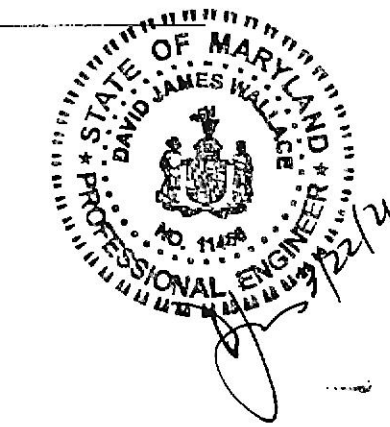

Owner
Project Name
Floor Attachment
Details

Project number 2021-572
Date 2-3-2021
Drawn by Author
Checked by Checker

S-005

Scale As indicated