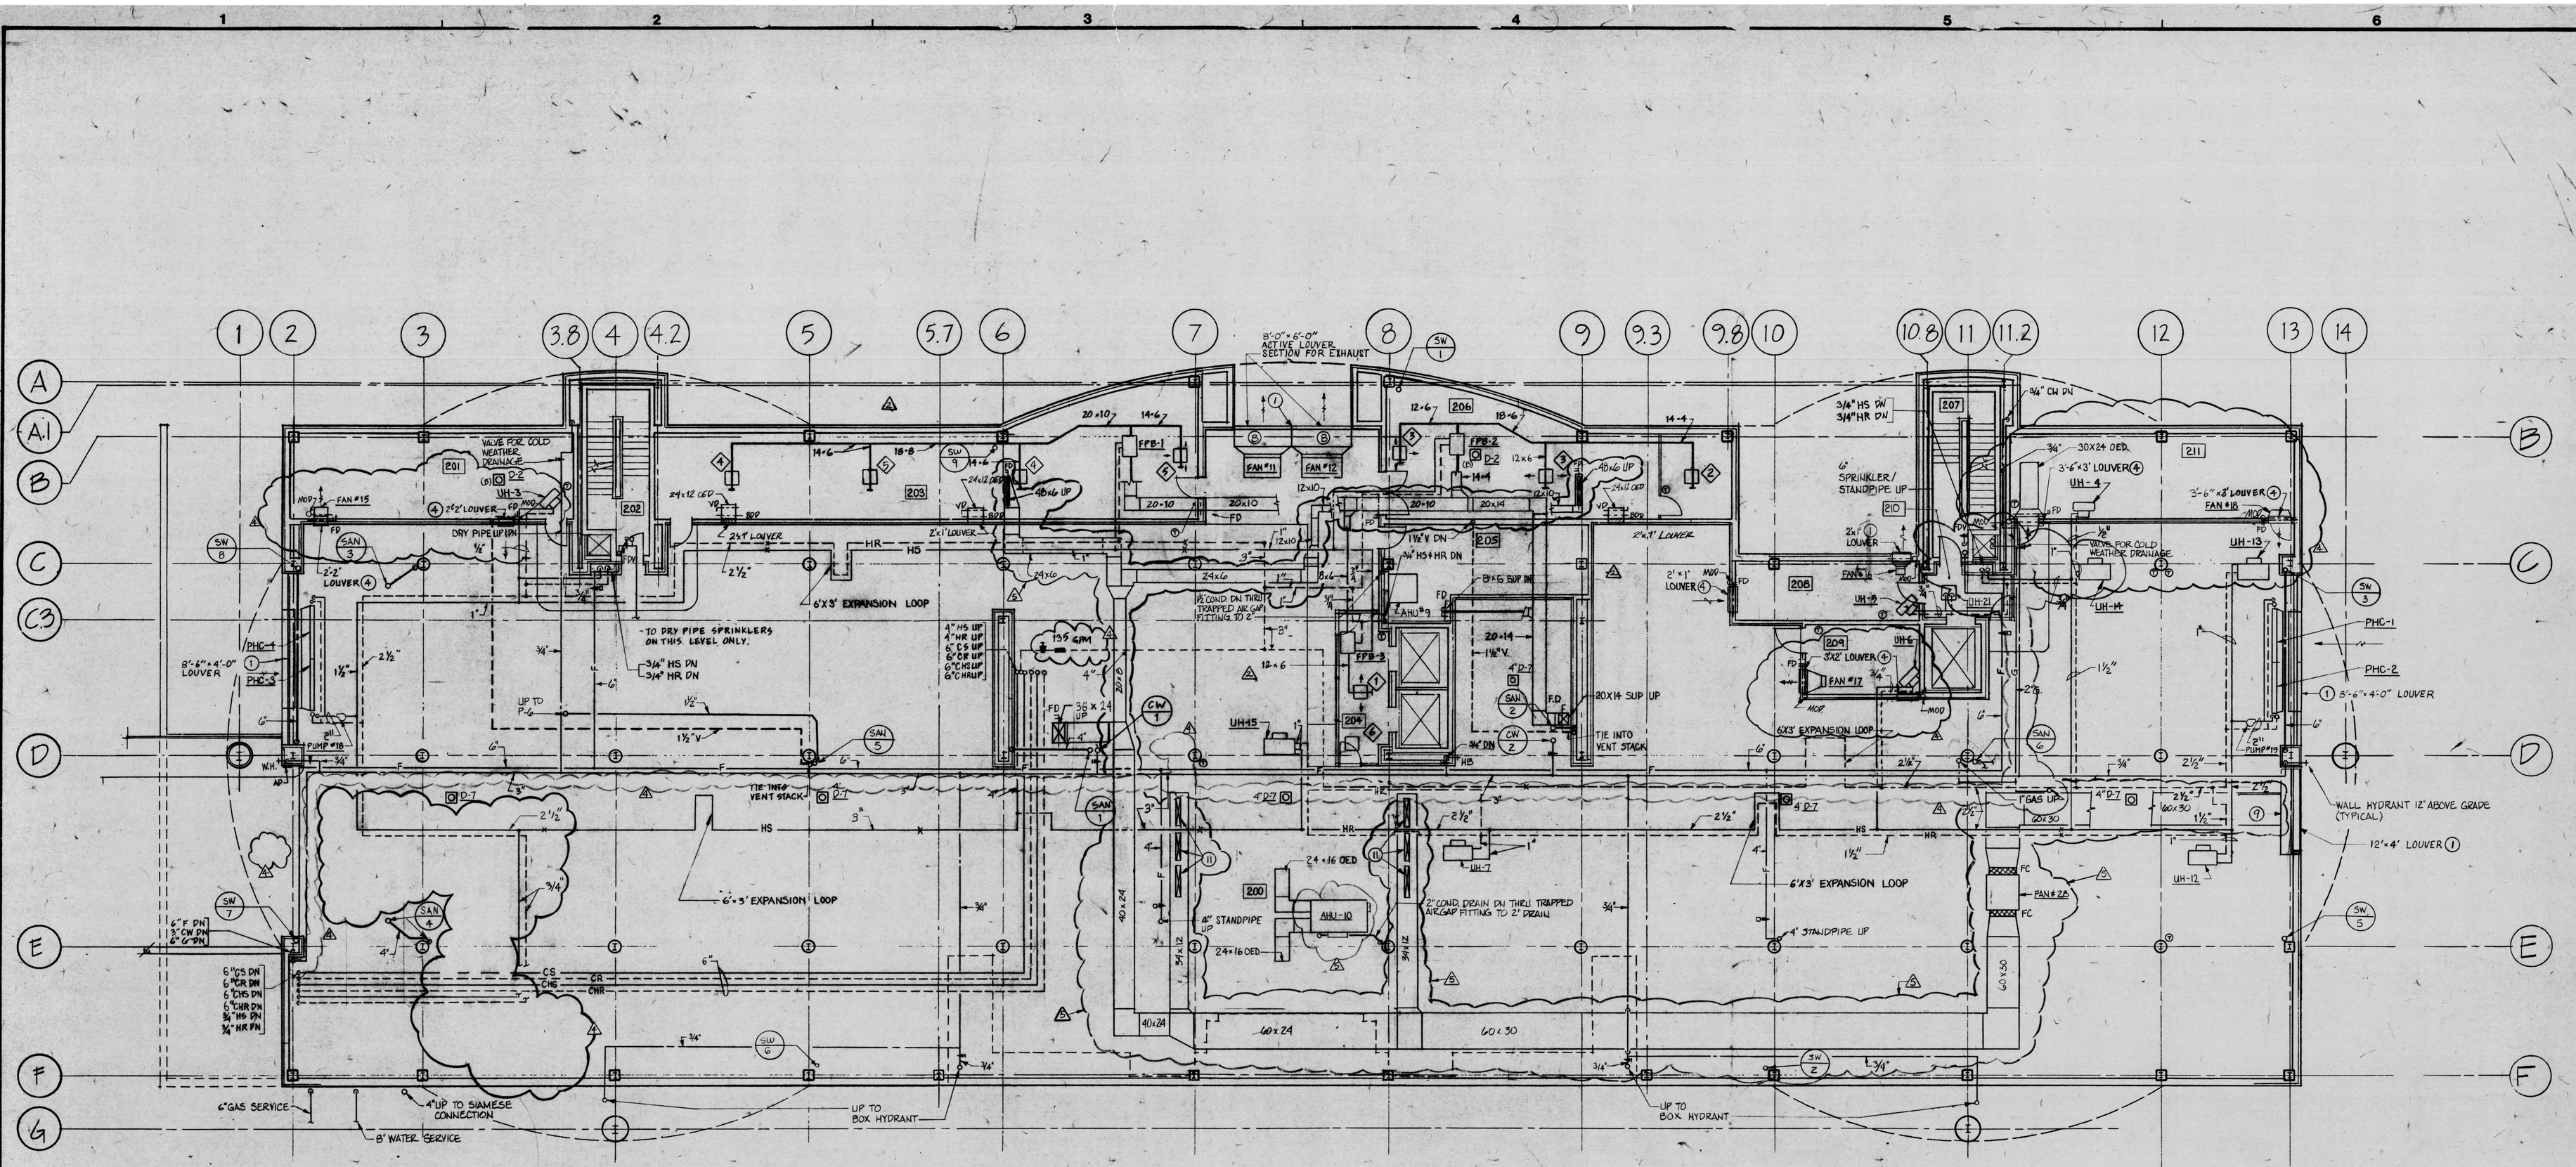


**UPPER LEVEL**

| ROOM NUMBER | ROOM NAME |
|---|---|
| 200 | GARAGE |
| 201 | STORAGE |
| 202 | STAIR |
| 203 | FILE STORAGE |
| 204 | VESTIBULE |
| 205 | PHONE ROOM |
| 206 | MAINTENANCE |
| 207 | STAIR #2 |
| 208 | JAN. STOR. |
| 209 | ELEV. MACH. ROOM |
| 210 | VESTIBULE |
| 211 | ELECTRIC ROOM |

**AIR DEVICE SCHEDULE**

| NO. | TYPE | CFM | NECK SIZE | REMARKS |
|---|---|---|---|---|
| 1 | D-1 | 270 | 8 X 8 | 2 WAY BLOW |
| 2 | D-1 | 285 | 10 X 10 | |
| 3 | D-1 | 300 | 10 X 10 | |
| 4 | D-1 | 405 | 12 X 12 | |
| 5 | D-1 | 410 | 12 X 12 | |
| 6 | G-1 | 270 | 8 X 8 | |
| 7 | G-1 | 285 | 10 X 10 | |
| 8 | G-1 | 815 | 14 X 14 | |
| 9 | G-2 | 1700 | 22 X 18 | |
| 10 | | | | DELETED |
| 11 | G-1 | 500 | 10 X 10 | |

**UPPER LEVEL PARKING**

SCALE: 1/8" = 1'-0"

**DRAWING NOTES:** (APPLY TO THIS DRAWING ONLY)

1. ENTIRE FLOOR TO BE SPRINKLERED FROM THE DRY PIPE SPRINKLER SYSTEM.
2. ALL VERTICAL PIPING AT COLUMN WALL LOCATIONS SHALL BE WITHIN COLUMN WALL ENCLOSURE

**SPECIAL NOTES:** (APPLY TO THIS DRAWING ONLY)

1. LOUVER SPECIFIED UNDER ARCHITECTURAL DIVISION.
2. 20" X 12" KITCHEN EXHAUST UP AND 30" X 12" KITCHEN EXHAUST UP.
3. 3' X 4' LOUVER SPECIFIED UNDER ARCHITECTURAL DIVISION.
4. LOUVER SPECIFIED UNDER MECHANICAL DIVISION. INSTALL 7'0" AFF TO TOP
5. BOTTOM OF 2' X 1' LOUVER SHALL BE 9'-6" A.F.F. LOUVER SPECIFIED UNDER MECHANICAL DIVISION.
6. DELETED
7. 3' X 4' LOUVER SPECIFIED UNDER ARCHITECTURAL DIVISION. PROVIDE 2' X 1' ACTIVE SECTION OF LOUVER FOR VENTILATION INTAKE. BLANK-OFF UNUSED PORTION OF LOUVER WITH INSULATED SHEET METAL PLATE. PAINT LOUVER SIDE OF METAL PLATE FLAT/BLACK.
8. PROVIDE SHEET METAL TRANSITION FROM FAN TO 8' X 8' EXHAUST LOUVER SECTION.
9. 3' X 4' X 12' INTAKE PLENUM FOR SMOKE CONTROL SYSTEM.
10. DELETED

(11) 48x6 UP. PROVIDE FIRE DAMPER AT FLOOR SLAB ABOVE (TYP.)

**BID PACKAGE #3**

Henry Adams, Inc.
Mech./Elect. Engineers

Faisant Associates, Inc.
Structural Engineers

Gaudreau, Inc.
Architects Planners Engineers
Baltimore
810 Light Street Baltimore Maryland 21230

**CORPORATE HEADQUARTERS**

# McCormick & Company

**LOVETON BUSINESS CENTER**
**BALTIMORE COUNTY, MARYLAND**

**REVISIONS**

| NO. | DATE | DESCRIPTION |
|---|---|---|
| 2 | 5-17-90 | ADDENDUM NO. 2 |
| 1 | 8-16-90 | CONSTRUCTION SET |
| 2 | 8-15-90 | CDM-1 |

**UPPER LEVEL PARKING**

PROJ. NO. 9014.10
DWG. NO. M-4
DATE 4/11/90