

**DECORATIVE LIGHTING SCHEDULE**

Symbol	Description/Area	Manufacturer	Specification	Supplied By/Installed By	CSCI	OSCI	OSOI
<b>Decorative Lighting</b>							
BAR-LT-01	Bar Pendant	Rejuvenation	Item/Item #:Laurelhurst 16" Prismatic Dome LED Pendant			X	
	Main Bar	www.rejuvenation.com	Item #: A0372 Color: Brushed Nickel Dimensions: 16" Dia. Lamping: LED 12.6W				
			Installation Note: Install per Manf. Instructions				
BAR-LT-02	String Pendant	Color Cord	Item: Custom 20 Port Canopy with 12' length pendant			X	
	Booths adjacent to entry door	colorcord.com	cords and silicone socket covers Color: Canopy: Plated Satin nickel, Cord: Cardinal Socket Cover: Red Dimensions: 18" x 36" Canopy, 12'-0" Length Lamping: (20) LED Filament E26 9 Watt Max				
			Installation Note: Install per Manf. Instructions				
BAR-LT-03	Wall Sconce	Remington Lighting	Item/Item #: Custom White Enamel Sconce			X	
	Main Dining at Columns		Color: White Enamel and Nickel finish Dimensions: 14.5" H x 12.75" Wide x 16" Deep Lamping: E26 Lamp 75W Max				
			Installation Note: Install per Manf. Instructions				
BAR-LT-04	Outdoor Sconce	Hallmark Lighting	Item/Item #: Custom Lantern Sconce			X	
	Outdoor Dining		Color: Black Iron Dimensions: 7-1/2" W x 20" H. x 4" Projection Lamping: (2) E12/ 3.5 Watt Candelabra Sockets				
			Installation Note: Install per Manf. Instructions				
BAR-LT-05	Host Desk Pendant	Apparatus	Item: Custom fixture with three conical downlights and six sockets with exposed lamping, single canopy			X	
	Entry	apparatusstudio.com	Finish: Old Brass Dimensions: x" Wide x 20.5" Deep x 72" High				
			Lamping: G25 E26 4.5W Archipelago Globe				
			LTG25F50027MB				
BAR-LT-06	Custom Chandelier	Hallmark Lighting	Item: Custom 6-arm pendant			X	
	Main Dining over Booths		Finish: Painted Faux Galvanized Steel High Gloss Black Shade Tops, Frosted Glass Half Gloves Dimensions: 78" Diameter x 63" OAH Lamping: G25 E26 4.5W Archipelago Globe				
			LTG25F50027MB				
BAR-LT-07	Picture Light	Troy Lighting	Item/Item #: Classic Contemporary C9-51			X	
	Raw Bar at Chalkboards		Color: Satin Brass Dimensions: 2" H. x 9" W. x 5-7" D. Lamping: (1) 25W T10 Med Base				
			Installation Note: Install per Manf. Instructions				
BAR-LT-08	Raw Bar Pendant	Apparatus	Item: Custom fixture with five conical downlights and ten sockets with exposed lamping, triple canopy			X	
	Raw Bar	apparatusstudio.com	Finish: Old Brass Dimensions: 84" Wide x 20.5" Deep 38" High Lamp:(6) G25/E26 4.5W Archipelago LTG25F50027MB				
			(3) G16 / E26, 3.5W, 2700K #LTG165F35027MB				
BAR-LT-09	Pendant	Urban Electric	Item: Urban Smokebell Hang Small			X	
	Restroom Hallway	urbanelectric.com	MA-9106HS-BZ-TM Finish: Bronze BZ Translucent Antique Mirror TM Dimensions: 13.5" W x 21" H. x 10" D. Lamping: (1) 10W LED				
			Installation Note:				
BAR-LT-10	Picture Light	Troy Lighting	Item/Item #: Classic Contemporary DCLEDZ24-51			X	
	Art Wall at Bar		Color: Satin Brass Dimensions: 4.5" H. x 24" W. x 8.25" D. Lamping: (1) LED 9W 2700K				
			Installation Note: Install per Manf. Instructions				

**ARCHITECTURAL LIGHTING SCHEDULE**

NOTES (APPLY TO ALL LIGHTING)							
1. MUST BE CONTRACT QUALITY AND UL LISTED.							
2. LIGHTING TO BE INSTALLED AS RECOMMENDED BY MANUFACTURER.							
3. SEE ID DRAWINGS FOR LOCATIONS AND DETAILS.							
4. SUBMIT FINISH SAMPLES FOR DESIGNER'S APPROVAL.							
5. ALL LAMPS TO BE 2700K UNLESS OTHERWISE NOTED.							
6. ALL FIXTURES SPECIFIED ARE 120 V, UNLESS OTHERWISE NOTED							
7. QUANTITY MUST BE VERIFIED BY CONTRACTOR PRIOR TO PLACING ORDER.							
8. FIXTURES TO BE INSTALLED AND ASSEMBLED BY CONTRACTOR.							
9. REFER TO ID DRAWINGS FOR LOCATIONS.							
10. REFER TO ID CONDOC.MANUAL FOR SPECIFICATIONS IN DETAIL.							
11. GC TO COORDINATE WITH THE MANUFACTURER FOR ALL THE SPRINKLER LOCATION CUTOUTS PRIOR TO MANUFACTURING.							
ARCHITECTURAL LIGHTING:							
#	ITEM/ AREA	MFG./ DISTRIBUTOR	DESCRIPTION	DIMMING	SUPPLIED BY		
					OSOI	OSCI	CSCI
A1FW	Nom 1" adj downlight	Kreon	Spec#: KUJAPL-40-DR-FL-27-02-95-WHT-D2-RM12W-44 Description: 1 in adj. downlight, flood beam, 0-10 Lamping: 4W 2700K 0-10 dim NOTE: Reqs remote driver # KR772232 (20W remote driver)	0-10			X
AA4A	4 in adjustable downlight	TECH	Spec#: E4R L-LOWD 18 A I-010 / Trim: E4R L F-O B Description: 4 in adj. downlight, IC airtight, flangeless, 18 deg beam, warm dim, black finish Lamping: 18W, 3000K-1800K, 1320 lu NOTE:	0-10			X
A4B1	4 in adjustable downlight	TECH	Spec#: E4R L-LOWD 25 A I-010 / Trim: E4R L F-O B Description: 4 in adj. downlight, IC airtight, flangeless, 25 deg beam, warm dim, black finish Lamping: 18W, 3000K-1800K, 1320 lu NOTE:	0-10			X
A4C	4 in adjustable downlight	TECH	Spec#: E4R L-LOWD 40 A I-010 / Trim: E4R L F-O W Description: 4 in adj. downlight, IC airtight, flangeless, 40 deg beam, warm dim, white finish Lamping: 18W, 3000K-1800K, 1320 lu NOTE:	0-10			X
A5	4 in dual adjustable downlight	TECH	Spec#: EMOH-12-F-LH-N-120-010-B / EMO-9-27-A30-B / MOC-SF Description: 4 in DUAL adj. downlight, NON-IC, flangeD, 30 deg beam, warm dim, BLACK Lamping: 18W, 2700K, 1320 lu NOTE:	0-10			X
C1	Led strip with shallow frosted tube for bar/Under counter	Optic Arts	Spec#: FLEXDC 40 27 24 30 (length in.) /ALUM. CHANNEL: CHS-S-1208 /LENS: CHS-12mm-CG Description: LED strip in grazer lens extrusion for undercounter mounting Lamping: 3.0w / FT, 2700K NOTE: CONTRACTOR TO PROVIDE CABLES AND TRANSFORMERS AS REQD	MLV			X
C2	LED strip in channel extrusion with shallow frosted tube for bar/Under counter	Optic Arts	Spec#: FLEXDC 68 30 24 30 (length in.) /ALUM. CHANNEL: CHS-S-1208 /LENS: CHS-12mm-CF Description: LED strip in frosted lens extrusion for undercounter mounting Lamping: 3.0w / FT, 3000K NOTE: CONTRACTOR TO PROVIDE CABLES AND TRANSFORMERS AS REQD	MLV			X
C3	LED strip in 45 DEG corner extrusion for bar shelving	Optic Arts	Spec#: FLEXDC 68 30 24 30 (length in.) /ALUM. CHANNEL: CHS-C-1919-CF Description: LED strip in 45 deg corner extrusion for bar shelving, frosted lens Lamping: 3.0w / FT, 3000K NOTE: CONTRACTOR TO PROVIDE CABLES AND TRANSFORMERS AS REQD	NON-DIM			X
C4	Led strip with flush mount frosted lens for windowsill	Optic Arts	Spec#: FLEXDC 40 27 24 30 (length in.) /ALUM. CHANNEL: CHS-R-1208 /LENS: CHS-12mm-CF Description: LED strip in flush mount extrusion & frosted lens for windowsill flush mounting Lamping: 3.0w / FT, 2700K NOTE: CONTRACTOR TO PROVIDE CABLES AND TRANSFORMERS AS REQD	MLV			X
D4A	4 in downlight	TECH	Spec#: E4R L-LOWD 18 D I-010 / Trim: E4R L F-O W Description: 4 in downlight, IC airtight, flangeless, 18 deg beam, warm dim, white finish Lamping: 18W, 3000K-1800K, 1320 lu NOTE:	0-10			X
D4A1	4 in downlight	TECH	Spec#: E4R L-LOWD 18 D I-010 / Trim: E4R L F-O B Description: 4 in downlight, IC airtight, flangeless, 18 deg beam, warm dim, black finish Lamping: 18W, 3000K-1800K, 1320 lu NOTE:	0-10			X
D4B	4 in downlight	TECH	Spec#: E4R L-LOWD 25 D I-010 / Trim: E4R L F-O W Description: 4 in downlight, IC airtight, flangeless, 25 deg beam, warm dim, white finish Lamping: 18W, 3000K-1800K, 1320 lu NOTE:	0-10			X
D4B1	4 in downlight	TECH	Spec#: E4R L-LOWD 25 D I-010 / Trim: E4R L F-O B Description: 4 in downlight, IC airtight, flangeless, 25 deg beam, warm dim, black finish Lamping: 18W, 3000K-1800K, 1320 lu NOTE:	0-10			X
D4C	4 in downlight	TECH	Spec#: E4R L-LOWD 40 D I-010 / Trim: E4R L F-O W Description: 4 in downlight, IC airtight, flangeless, 40 deg beam, warm dim, white finish Lamping: 18W, 3000K-1800K, 1320 lu NOTE:	0-10			X
TA	Adjustable track head for 2 circuit monorail	TECH	Spec#: Head: 700 TLT MO2 06 Z / Shade: 700SDAAZ Description: 2 circuit monorail MR16 head, antique bronze finish, w/Amber Soda Glass shade Lamping: Soraa LED MR16 FLOOD SM16-09-36D-927-03 NOTE:	0-10			X
TB	Adjustable track head for 2 circuit monorail	TECH	Spec#: Head: 700 TLT MO2 06 Z / Shade: 700AERBELLBZ Description: 2 circuit monorail MR16 head, antique bronze finish, w/Bronze bell shade Lamping: Soraa LED MR16 MED FLOOD SM16-09-36D-927-03 NOTE:	0-10			X
TR1	2 Circuit Monorail track	TECH	Spec#: Track: 700MO2A (length in.) BR Z / Standoff: 700MO2S 02 Z / Power feed: 700MO2P4C40Z / Flexible rail connector: 700MO2CFXHZ Description: Track, brown plastic insulator, antique bronze finish(2" standoffs) Lamping: (see TA for lamping) NOTE: CONTRACTOR TO PROVIDE: Tech 2x150W mag 12V power supply P/N: 700AT2X150T, ASSORTED PART(S) LISTED ABOVE, AND CABLES AS REQD.	MLV			X

City of Houston Texas  
  
 18076069  
 REVIEWED FOR COMPLIANCE

Performance of this review does not relieve the applicant from full responsibility to comply with all applicable codes, ordinances and regulations 10/29/18

**ARCHI:**  
 HapstakDeme.  
 2715 M Street, NW  
 Suite 4  
 Washington, DC 20007 info@hc...  
 WWW:  
 ARCHITECTURE | DESIGN

**INTERIOR DESIGNER**  
 Patrick Sutton  
 1000 Light St.  
 Baltimore, MD 21230  
 410-783-1500

**CLIENT**  
 Alexander Smith  
 (410) 241-1224  
 afsmith11@gmail.com

**STRUCTURAL ENGINEER**  
 BEI Structural Engineers  
 3930 Pender Dr. Suite175  
 Fairfax, VA 22030


**MEP ENGINEER**  
 J.B. Wyble and Associates, P.A.  
 7950 Norfolk Ave., Bethesda, MD  
 301-654-1410

**FOOD SERVICE CONSULTANT**  
 JLA Corp  
 13031 US Highway  
 19N, Clearwater, FL 33764  
 727-470-7862

PROJECT NO. 17054

**LOCH BAR HOUSTON**

4444 WESTHEIMER RD  
 HOUSTON, TX 77027,  
 SUITE 110

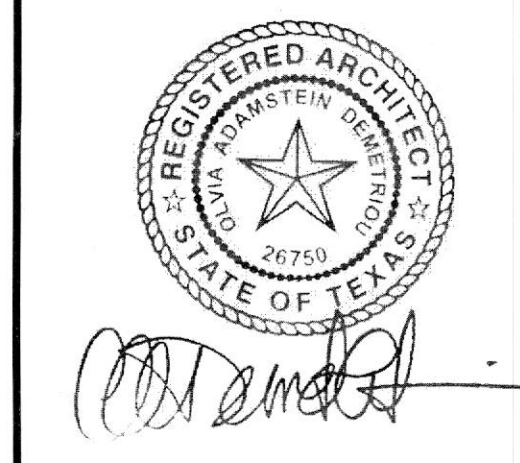

I CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED ARCHITECT UNDER THE LAWS OF TEXAS LICENSE NO. 26750 EXPIRATION DATE: 8/31/2018

REV	DATE	ISSUED FOR
	6/20/18	PERMIT SET

**LIGHTING SCHEDULES**

**ID9-1**  
 PRINTED: 6/21/18  
 © HapstakDemetriou+, pllc 2018