



*ALL FIRST*

*TF-1*

**COMPACT ECONOMICAL FAN**

**Features:**

- 56 CFM, 3.4 Sones @ 0.0" Ps
- Quiet-designed durable blower wheels
- Torsion spring grille mounting – no tools needed
- Compact housings fit easily between wall studs
- Double strength steel mounting flanges with keyhole slots for fast, sturdy installation
- UL listed for use over bathtubs and showers when connected to a GFCI protected branch circuit
- AMCA licensed for both air and sound

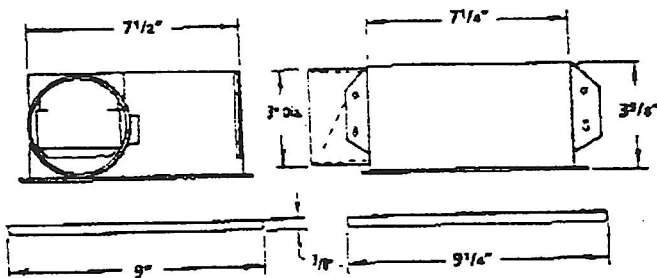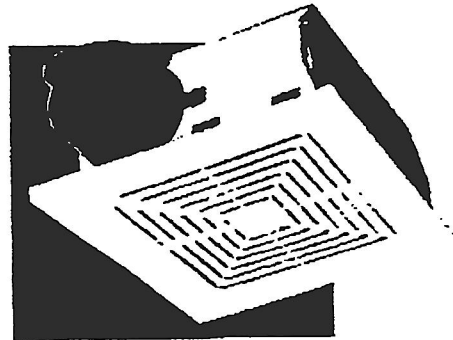

**Optional Accessories**

FLAT ROOF CAP	DR8F
SLOPED ROOF CAP	SL20
WALL CAP	WC10
SPEED CONTROL	LT30
TIMER SWITCH	AM12
CEILING RADIATION DAMPER	NA

**Performance Data**

MODEL NO.	SONES AT 0.0" Ps	CFM AT STATIC PRESSURE (PS - INCHES OF H <sub>2</sub> O)						VOLTS	WATTS	NOMINAL RPM	DUCT DIA.
		0.0	0.1	.125	.250	.375	.500				
Z1	3.4	56	51	50	46	41	32	120	55	1700	3"

Performance shown is for installation type B - Free inlet, ducted outlet. Performance ratings include the effects of inlet grille and backdraft damper in the airstream. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5' (1.5m) in a hemispherical free field calculated per AMCA std. 301. Values shown are for installation Type B: free inlet fan sone levels.